



Thank you for purchasing the Heavy-Duty King Pin Tripod Stabilizer (PN 19-950001).
It was a wise purchase, and we're sure it will provide you with many years of service.

Assembly Instructions

Most of the assembly has been completed for you - however you will need to attach the footpads
(clip assembly provided) and chain.

How to Use


To use your tripod:

1. Hold the chain in one hand, and position the tripod below the king pin of your coach.
2. Pull the chain and lift the cup up over the king pin.
3. Hook the chain link over the pin welded to the leg bracket.
4. Turn the handle of the cup counter clockwise until the cup is snug against the king pin.
5. Two or three additional turns are normally sufficient for stabilization.
6. Your tripod is adjustable from 42" to 50".
7. Your tripod will support up to 5,000 pounds.

To lock:

1. Place the lock through the two holes in the cup and lock. The neck of the lock has enough interference in the cup so that the king pin cannot be removed. **Your tripod is now stable and secure.**

ILLUS. #	PART NUMBER	PART NAME	QTY REQ
1	19-001008	Cup Assembly	1
2	19-001020	Bolt- 3/8-16 x 2" Hex	3
3	38-020090	Nut- 3/8-16 Nylock	9
4	19-001006	Bracket-Leg	1
5	19-001071	Leg-Steel Truss	3
6	19-001005	Chain	1
7	19-001018	Bolt- 3/8-16 x 1" Truss	3
8	19-001004	Bracket-Connecting	1
9	19-001072	Arm-Short Steel	3
10	19-001019	Bolt- 3/8-16 x 1 3/4" Hex	3
11	38-141023	Clip Assembly 2 1/2"	3
12	19-001073	Footpad-UF Stamped	3
13	19-001022	Pad Lock	1

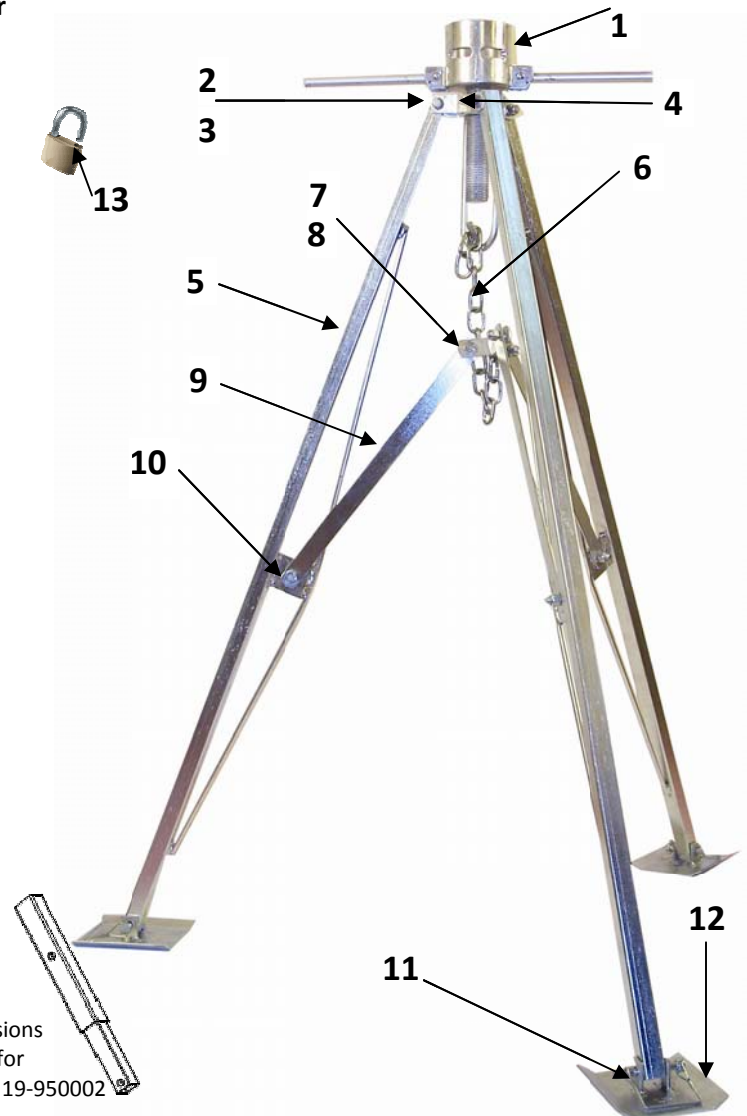

The tripod is not a jack!

It is **NOT** made to support the weight of the trailer. It is a stabilizer designed to reduce or eliminate the vibrations and motion that travels through the frame.

8" Leg Extensions
are available for
purchase p/n 19-950002